# GISTIC

# MEASURING INSTRUCTIONS

accurate sizing. The comfort and fit of your uniform depend on

by our system to recommend your garment sizes obtain precise body measurements that will be used The following instructions are designed to help you

# BASIC GUIDELINES

- by yourself. Have your measurements taken by another person It is almost impossible to take accurate measurements
- You should NOT wear low-rise pants that fit well and have a regular waistband. Wear a tight-fitting top and a pair of lightweight pants
- rings, bracelets and necklaces. Remove your belt and jewellery, including your watch
- Empty your pockets
- pinned or tied back. If you have long hair it should be hanging down, not
- Remove your shoes and wear socks that you normally wear for work
- comfortably Stand straight and still, with your arms hanging
- Do not hold your breath

# GUIDELINES FOR TAKING MEASUREMENTS

- Do not tighten the tape, or leave too much slack
- Do NOT estimate measurements

always take the larger measurement. If a reading falls between two lines on the tape

Do NOT increase the measurements taken. provide ample room for ease of movement. Logistik's sizing system and garment designs already

## NEED HELP?

1-888-326-8688 or 450-349-9700 Call Logistik Customer Service


These instructions are also available on our website.

the tape (Figure 4

### HEAD

- above the ears (Figures 1A and 1B). Wrap the tape around the widest point of the head, just
- 12 (Figure 18). Take the measurement on the forehead, near the temple

the tape (Figure The measurement is the number that lines up with the edge of 10

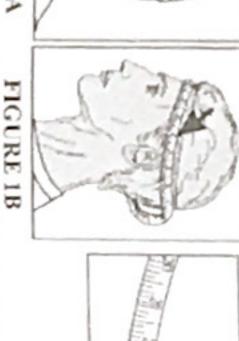

(1)

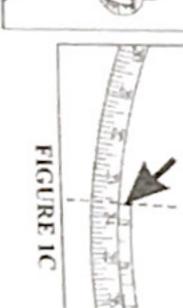


FIGURE 1

#### NECK

- Taken directly against the skin
- Wrap the tape around the base of the neck
- 2 At the front of the neck, where the top button would be insert a finger between the tape and the skin, at this making a "V" (Figures 2A and 2B). You should be able to of the tape located if a collar were buttoned up, cross the leading edge location (Figure 28). over the length of the tape at a 90° angle,

of the edge of the tape (Figure The measurement is the number that lines up with the bottom 28).






### CHEST

FIGURE

tight, tape must be parallel to the floor and snug, though not the chest, just under the shoulder blades (Figure 3A). The Wrap the tape under the arms, around the widest part of

the tape (Figure The measurement is the number that lines up with the edge of 3B)

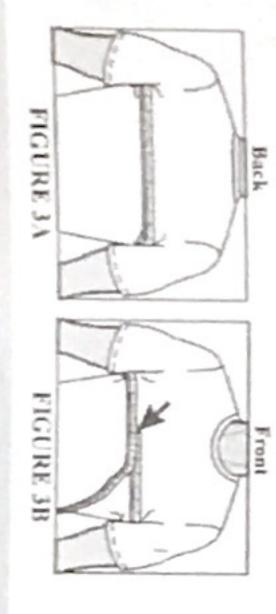

#### WAIST

body. Wrap the tape around the body (NOT over the pants), at the floor and fit snugly rather than tightly against the waist level (Figures 4A and 4B. The tape must be parallel to

The measurement is the number that lines up with the edge of B)



'n


the bottom of the trouser leg, along the outer seam

(Figure 8A).

# Arms crossed and feet together

Wrap the tape around the fullest part of the seat fit snugly rather than tightly against the body. (Figure 5A). The tape must be parallel to the floor and

the tape (Figure 5B) The measurement is the number that lines up with the edge of

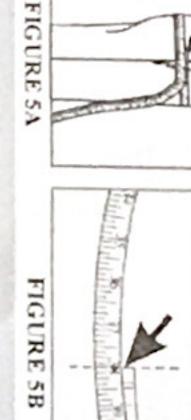


# SLEEVE LENGTH

middle finger should be aligned with the center of the the hand toward the chest, with the palm facing downwards The forearm should be parallel to the floor and the tip of the Right arm raised to the side and bent at the elbow to bring

- Place the leading edge of the tape in the middle of the upper back, at the base of the neck (Figure 6A)
- Stretch out the tape across the back, and all the way to the wrist (Figure 6B). down to the elbow

wrist bone (Figure 6B). The measurement is the number that lines up just past the

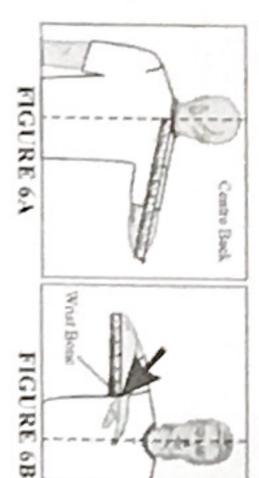

### HAND

Dominant hand (e.g. if right-handed measure the right hand)

- Starting under the hand (Figure 7A), wrap the tape around the hand, excluding the thumb and across the top of the knuckles (Figure 78).
- Holding the tape in place, instruct the person to clench his or her fist, and allow the tape to adjust itself to fit snugly rather than tightly (Figure 78).

N

of the tape (Figure 78). The measurement is the number that lines 듐 with the edge






# OUTSEAM

# Use one of the following methods

Method 1 (recommended)

- Take a pair of dress pants that have a waistband, fit you well and are the right length.
- 1 Do NOT use low-rise pants
- Measure the distance from the top of the waistband to Lay the pants on a table with the waistband fastened and the side seam facing up

of the pants The measurement is the number that lines up with the bottom

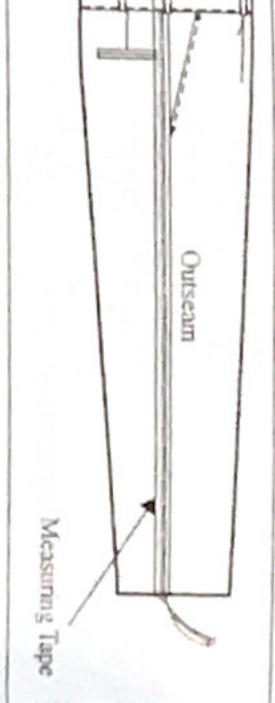


### FIGURE 8A

#### Method 2

- side of the torso, at the waistline Place the leading edge of the tape to the
- N Run the length of the tape down along the leg (Figure 8B)

the floor. The measurement is the number that lines up with

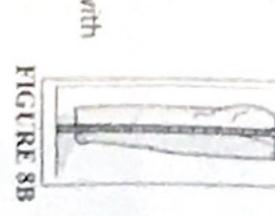

#### FOOT

the indicated instructions Use the foot measuring device provided by Logistik, follow

### HEIGHT

# Use one of the following methods

Method I (recommended)

# Standing with back against a wall, heels together

Place a flat, rigid tool (e.g. wooden ruler) on top of

N Place the leading edge of the tape at this spot and the head to form a 90° angle with the wall. measure the distance in a straight line to the floor

accuracy) Method 2 (approximate to within 1 inch or 2.5 cm of

Arms stretched out sideways at shoulder height

Place the leading edge of the tape at the tip of the hand's middle finger line, the distance across the back to the tip of the other middle finger of one hand and measure, in straight

